

Release Notes

FortiAnalyzer 7.0.3



FORTINET DOCUMENT LIBRARY

<https://docs.fortinet.com>

FORTINET VIDEO GUIDE

<https://video.fortinet.com>

FORTINET BLOG

<https://blog.fortinet.com>

CUSTOMER SERVICE & SUPPORT

<https://support.fortinet.com>

FORTINET TRAINING & CERTIFICATION PROGRAM

<https://www.fortinet.com/training-certification>

NSE INSTITUTE

<https://training.fortinet.com>

FORTIGUARD CENTER

<https://www.fortiguard.com>

END USER LICENSE AGREEMENT

<https://www.fortinet.com/doc/legal/EULA.pdf>

FEEDBACK

Email: techdoc@fortinet.com



February 28, 2023

FortiAnalyzer 7.0.3 Release Notes

05-703-772395-20230228

TABLE OF CONTENTS

Change Log	6
FortiAnalyzer 7.0.3 Release	7
Supported models	7
FortiAnalyzer VM subscription license	7
Management extension applications	8
Supported models for MEA	8
Minimum system requirements	8
FortiRecorder	9
Supported models for FortiRecorder	9
Supported cameras	9
Special Notices	11
Fortinet verified publisher docker image	11
Hyperscale firewall mode	12
Modifying the interface status with the CLI	13
Citrix XenServer default limits and upgrade	13
FortiAnalyzer VM upgrade requires more memory	13
Maximum ADOM limits for FortiAnalyzer	14
Port 8443 reserved	14
Hyper-V FortiAnalyzer-VM running on an AMD CPU	14
SSLv3 on FortiAnalyzer-VM64-AWS	14
Upgrade Information	15
Downgrading to previous firmware versions	15
Firmware image checksums	15
FortiAnalyzer VM firmware	15
SNMP MIB files	17
Product Integration and Support	18
Supported software	18
Web browsers	19
FortiOS and FortiOS Carrier	19
FortiADC	19
FortiAI	19
FortiAnalyzer	19
FortiAuthenticator	20
FortiCache	20
FortiClient	20
FortiDDoS	20
FortiDeceptor	20
FortiFirewall and FortiFirewallCarrier	21
FortiMail	21
FortiManager	21
FortiNAC	21
FortiProxy	21
FortiSandbox	21

FortiSOAR	22
FortiSwitch ATCA	22
FortiWeb	22
Virtualization	22
Feature support	23
Language support	23
Supported models	24
FortiGate models	25
FortiGate special branch models	28
FortiCarrier models	29
FortiADC models	30
FortiAI models	31
FortiAnalyzer models	31
FortiAuthenticator models	32
FortiCache models	32
FortiDDoS models	32
FortiDeceptor models	32
FortiFirewall models	33
FortiFirewallCarrier models	33
FortiMail models	33
FortiNAC models	33
FortiProxy models	34
FortiSandbox models	34
FortiSOAR models	34
FortiSwitch ATCA models	34
FortiWeb models	35
Resolved Issues	36
Device Manager	36
Fabric View	36
FortiSOC	36
FortiView	37
Log View	37
Others	38
Reports	38
System Settings	39
Known Issues	40
Device Manager	40
FortiSOC	40
FortiView	40
Log View	40
Others	41
Reports	41
System Settings	41
Appendix A - Default and maximum number of ADOMs supported	43
Hardware models	43
Virtual Machines	44

FortiAnalyzer subscription license	44
FortiAnalyzer perpetual license	44

Change Log

Date	Change Description
2022-02-02	Initial release.
2022-02-09	Added support for FortiOS 7.0.5 to FortiOS and FortiOS Carrier on page 19.
2022-02-10	Added note to Supported models on page 7.
2022-02-14	Moved 691552 to Resolved Issues on page 36.
2022-02-15	Removed 761972 from Known Issues on page 40.
2022-02-15	Added information about support for FortiFirewall and FortiFirewallCarrier.
2022-02-17	Added 685263 to Known Issues on page 40.
2022-03-07	Updated Supported models on page 7.
2022-03-15	Updated Resolved Issues on page 36.
2022-03-17	Updated FortiGate special branch models on page 28.
2022-04-11	Updated Resolved Issues on page 36.
2022-05-13	Updated Upgrade Information on page 15.
2022-07-06	Updated Upgrade Information on page 15.
2022-10-28	Updated Appendix A - Default and maximum number of ADOMs supported on page 43.
2023-02-28	Updated Known Issues on page 40.

FortiAnalyzer 7.0.3 Release

This document provides information about FortiAnalyzer version 7.0.3 build 0254.



The recommended minimum screen resolution for the FortiAnalyzer GUI is 1920 x 1080. Please adjust the screen resolution accordingly. Otherwise, the GUI may not display properly.

This section includes the following topics:

- [Supported models on page 7](#)
- [FortiAnalyzer VM subscription license on page 7](#)
- [Management extension applications on page 8](#)
- [FortiRecorder on page 9](#)

Supported models

FortiAnalyzer version 7.0.3 supports the following models:

FortiAnalyzer	FAZ-150G, FAZ-200F, FAZ-300F, FAZ-300G, FAZ-400E, FAZ-800F, FAZ-800G, FAZ-1000F, FAZ-2000E, FAZ-3000F, FAZ-3000G, FAZ-3500E, FAZ-3500F, FAZ-3500G, FAZ-3700F, FAZ-3700G, FAZ-3900E
FortiAnalyzer VM	FAZ_DOCKER, FAZ-VM64, FAZ-VM64-AWS, FAZ-VM64-Azure, FAZ-VM64-GCP, FAZ-VM64-HV (including Hyper-V 2016, 2019), FAZ-VM64-KVM, FAZ-VM64-OPC, FAZ-VM64-Xen (for both Citrix and Open Source Xen)



FAZ-300F supports the subscription license for the SOC service. However performance may be impacted because FAZ-300F has fewer resources and a smaller CPU than other FortiAnalyzer models that support the SOC service.

FortiAnalyzer VM subscription license

The FortiAnalyzer VM subscription license supports FortiAnalyzer version 6.4.1 and later. For information about supported firmware, see [FortiAnalyzer VM firmware on page 15](#).

See also [Appendix A - Default and maximum number of ADOMs supported on page 43](#).



You can use the FortiAnalyzer VM subscription license with new FAZ-VM installations. For existing FAZ-VM installations, you can migrate to a FortiAnalyzer VM subscription license, starting with FortiAnalyzer 7.0.1. See the [FortiAnalyzer 7.0.1 VM License Migration Guide](#).

Management extension applications

The following section describes supported models and minimum system requirements for management extension applications (MEA) in FortiAnalyzer 7.0.3.



FortiAnalyzer uses port TCP/443 or TCP/4443 to connect to the Fortinet registry and download MEAs. Ensure that the port is also open on any upstream FortiGates. For more information about incoming and outgoing ports, see the [FortiAnalyzer 7.0 Ports Guide](#).

Supported models for MEA

You can use any of the following FortiAnalyzer models as a host for management extension applications:

FortiAnalyzer	FAZ-3000F, FAZ-3000G, FAZ-3500E, FAZ-3500F, FAZ-3500G, FAZ-3700F, FAZ-3700G, FAZ-3900E
FortiAnalyzer VM	FAZ_DOCKER, FAZ-VM64, FAZ-VM64-AWS, FAZ-VM64-Azure, FAZ-VM64-GCP, FAZ-VM64-HV (including Hyper-V 2016, 2019), FAZ-VM64-KVM, FAZ-VM64-OPC, FAZ-VM64-Xen (for both Citrix and Open Source Xen)

Minimum system requirements

By default FortiAnalyzer VMs use the following system resource settings:

- 4 vCPU
- 8 GB RAM
- 500 GB disk space

Starting with FortiAnalyzer 7.0.0, RAM and CPU is capped at 50% for MEAs. (Use the `config system docker` command to view the setting.) If FortiAnalyzer has 8 CPUs and 16 GB RAM, then only 4 CPUs and 8 GB RAM are available to MEAs by default, and the 4 CPUs and 8 GB RAM are used for all enabled MEAs.

Some MEAs have minimum system requirements that require you to increase system resources. The following table identifies the minimum requirements for each MEA as well as the recommended system resources to function well in a production environment.

MEA minimum system requirements apply only to the individual MEA and do not take into consideration any system requirements for resource-sensitive FortiAnalyzer features or multiple, enabled MEAs.

Management Extension Application	Minimum system requirements	Recommended system resources for production*
FortiSOAR	<ul style="list-style-type: none"> • 4 vCPU • 8 GB RAM • 500 GB disk storage 	<ul style="list-style-type: none"> • 16 vCPU • 64 GB RAM • No change for disk storage

*The numbers in the *Recommended system resources for production* column are a combination of the default system resource settings for FortiAnalyzer plus the minimum system requirements for the MEA.

FortiRecorder

This section identifies what FortiAnalyzer models support the FortiRecorder module and what FortiCamera models are supported.

Supported models for FortiRecorder

Below is a list of the FortiAnalyzer appliances that support the FortiRecorder module.

Platform	Maximum number of cameras
FAZ-300F	6
FAZ-400E	12
FAZ-800F	16
FAZ-1000F	50
FAZ-2000E	40
FAZ-3000F	50
FAZ-3500G	50
FAZ-3700F	60

Supported cameras

The FortiRecorder module supports the following FortiCamera models:

- FCM-CB20
- FCM-FD20
- FCM-FD20B
- FCM-FD40
- FCM-MB40
- FCM-MD20

- FCM-MD40
- FCM-OB30

Special Notices


This section highlights some of the operational changes that administrators should be aware of in FortiAnalyzer version 7.0.3.

Fortinet verified publisher docker image


FortiAnalyzer 7.0.1 docker image is available for download from Fortinet's Verified Publisher public repository on dockerhub.

To download the FortiAnalyzer image from dockerhub:

1. Go to dockerhub at <https://hub.docker.com/>.
The dockerhub home page is displayed.

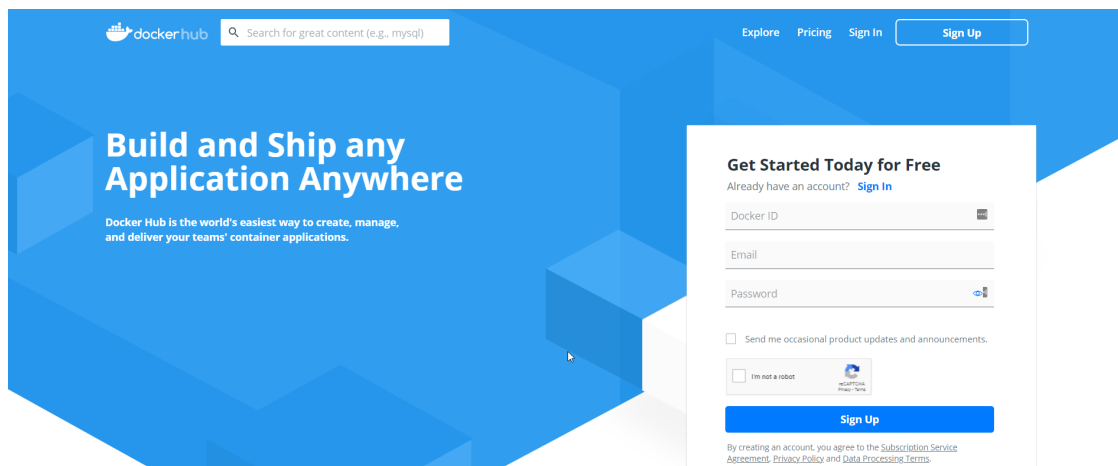


2. In the banner, click *Explore*.
3. In the search box, type *Fortinet*, and press *Enter*.
The *fortinet/fortimanager* and *fortinet/fortianalyzer* options are displayed.

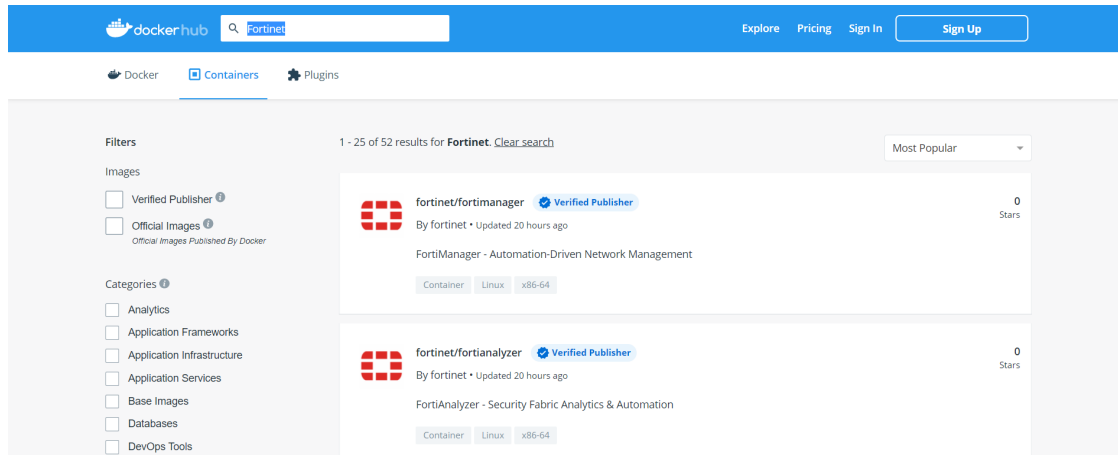

4. Click *fortinet/fortianalyzer*.

The *fortinet/fortianalyzer* page is displayed, and two tabs are available: *Overview* and *Tags*. The *Overview* tab is selected by default.

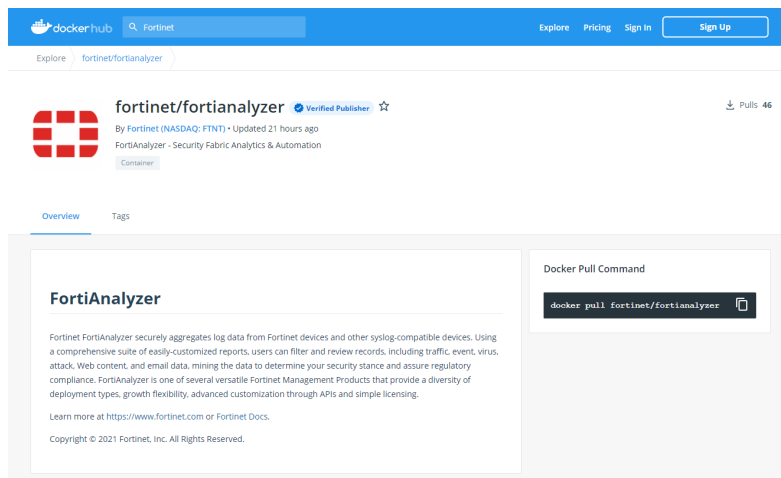

5. On the *Overview* tab, copy the docker pull command, and use it to download the image.

The CLI command from the *Overview* tab points to the latest available image. Use the *Tags* tab to access different versions when available.

Hyperscale firewall mode

FortiAnalyzer does not support logs from the following models when they have hyperscale firewall mode and netflow enabled:

- FortiGate-1800F
- FortiGate-1801F
- FortiGate-2600F
- FortiGate-2601F
- FortiGate-4200F
- FortiGate-4201F

- FortiGate-4400F
- FortiGate-4401F

FortiAnalyzer only supports logs when the normal firewall mode with standard FortiGate logging are enabled.

Modifying the interface status with the CLI

Starting in version 7.0.1, the CLI to modify the interface status has been changed from `up/down` to `enable/disable`.

For example:

```
config system interface
  edit port2
    set status <enable/disable>
  next
end
```

Citrix XenServer default limits and upgrade

Citrix XenServer limits ramdisk to 128M by default. However the FAZ-VM64-XEN image is larger than 128M. Before updating to FortiAnalyzer 6.4, increase the size of the ramdisk setting on Citrix XenServer.

To increase the size of the ramdisk setting:

1. On Citrix XenServer, run the following command:
`xenstore-write /mh/limits/pv-ramdisk-max-size 536,870,912`
2. Confirm the setting is in effect by running `xenstore-ls`.

`limits = ""`
`pv-kernel-max-size = "33554432"`
`pv-ramdisk-max-size = "536,870,912"`
`boot-time = ""`

3. Remove the pending files left in `/run/xen/pygrub`.



The ramdisk setting returns to the default value after rebooting.

FortiAnalyzer VM upgrade requires more memory

When upgrading FortiAnalyzer VM units from FortiAnalyzer 6.2.x to FortiAnalyzer 6.4.0 and later, the upgrade may fail because of memory allocation.

Workaround: Before upgrading FortiAnalyzer VM to FortiAnalyzer 6.4.0 and later, change the memory allocation to 8 GB of RAM.

Maximum ADOM limits for FortiAnalyzer

FortiAnalyzer hardware devices and VMs display a warning when the maximum number of ADOMs is reached or exceeded. The platform does not enforce the limit; however, adding more ADOMs may affect the performance of the unit. For more details, see [Appendix A - Default and maximum number of ADOMs supported on page 43](#).

Port 8443 reserved

Port 8443 is reserved for https-logging from FortiClient EMS for Chromebooks. See also [FortiAnalyzer 7.0 Ports Reference](#) on the Docs Library.

Hyper-V FortiAnalyzer-VM running on an AMD CPU

A Hyper-V FAZ-VM running on a PC with an AMD CPU may experience a kernel panic. Fortinet recommends running VMs on an Intel-based PC.

SSLv3 on FortiAnalyzer-VM64-AWS

Due to known vulnerabilities in the SSLv3 protocol, FortiAnalyzer-VM64-AWS only enables TLSv1 by default. All other models enable both TLSv1 and SSLv3. If you wish to disable SSLv3 support, please run:

```
config system global
    set ssl-protocol tlsv1
end
```

Upgrade Information

You can upgrade to the latest FortiAnalyzer 6.4 version, and then to 7.0.3.

If you are upgrading from FortiAnalyzer 7.0.1, upgrade to FortiAnalyzer 7.0.2, and then to 7.0.3.



For other upgrade paths and details about upgrading your FortiAnalyzer device, see the *FortiAnalyzer Upgrade Guide*.

This section contains the following topics:

- [Downgrading to previous firmware versions on page 15](#)
- [Firmware image checksums on page 15](#)
- [FortiAnalyzer VM firmware on page 15](#)
- [SNMP MIB files on page 17](#)

Downgrading to previous firmware versions

FortiAnalyzer does not provide a full downgrade path. You can downgrade to a previous firmware release by using the GUI or CLI, but doing so results in configuration loss. A system reset is required after the firmware downgrade process has completed. To reset the system, use the following CLI commands via a console port connection:

```
execute reset {all-settings | all-except-ip}  
execute format {disk | disk-ext4 | disk-ext3}
```

Firmware image checksums

The MD5 checksums for all Fortinet software and firmware releases are available at the Customer Service & Support portal, <https://support.fortinet.com>. After logging in, go to *Download > Firmware Image Checksums*, enter the image file name including the extension, and select *Get Checksum Code*.

FortiAnalyzer VM firmware

Fortinet provides FortiAnalyzer VM firmware images for Amazon AWS, Citrix and Open Source XenServer, Linux KVM, Microsoft Hyper-V Server, and VMware ESX/ESXi virtualization environments.

Amazon Web Services

- The 64-bit Amazon Machine Image (AMI) is available on the AWS marketplace.

Citrix XenServer and Open Source XenServer

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.OpenXen.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains the QCOW2 file for the Open Source Xen Server.
- `.out.CitrixXen.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains the Citrix XenServer Virtual Appliance (XVA), Virtual Hard Disk (VHD), and OVF files.

Google Cloud Platform

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.gcp.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation.

Linux KVM

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.kvm.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains QCOW2 that can be used by qemu.

Microsoft Azure

The files for Microsoft Azure have AZURE in the filenames, for example `<product>_VM64_AZURE-v<number>-build<number>-FORTINET.out.hyperv.zip`.

- `.out`: Download the firmware image to upgrade your existing FortiAnalyzer VM installation.

Microsoft Hyper-V Server

The files for Microsoft Hyper-V Server have HV in the filenames, for example, `<product>_VM64_HV-v<number>-build<number>-FORTINET.out.hyperv.zip`.

- `.out`: Download the firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.hyperv.zip`: Download the package for a new FortiAnalyzer VM installation. This package contains a Virtual Hard Disk (VHD) file for Microsoft Hyper-V Server.



Microsoft Hyper-V 2016 is supported.

Oracle Private Cloud

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.opc.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation.

VMware ESX/ESXi

- `.out`: Download the 64-bit firmware image to upgrade your existing VM installation.
- `.ovf.zip`: Download either the 64-bit package for a new VM installation. This package contains an Open Virtualization Format (OVF) file for VMware and two Virtual Machine Disk Format (VMDK) files used by the OVF file during deployment.



For more information, see the [FortiAnalyzer Data Sheet](#) available on the Fortinet web site. VM installation guides are available in the [Fortinet Document Library](#).

SNMP MIB files

You can download the *FORTINET-FORTIMANAGER-FORTIANALYZER.mib* MIB file in the firmware image file folder. The Fortinet Core MIB file is located in the main FortiAnalyzer version 5.00 file folder.

Product Integration and Support

This section lists FortiAnalyzer 7.0.3 support of other Fortinet products. It also identifies what FortiAnalyzer features are supported for managed platforms and what languages FortiAnalyzer supports. It also lists which Fortinet models can be managed by FortiAnalyzer.

The section contains the following topics:

- [Supported software on page 18](#)
- [Feature support on page 23](#)
- [Language support on page 23](#)
- [Supported models on page 24](#)

Supported software

FortiAnalyzer 7.0.3 supports the following software:

- [Web browsers on page 19](#)
- [FortiOS and FortiOS Carrier on page 19](#)
- [FortiADC on page 19](#)
- [FortiAI on page 19](#)
- [FortiAnalyzer on page 19](#)
- [FortiAuthenticator on page 20](#)
- [FortiCache on page 20](#)
- [FortiClient on page 20](#)
- [FortiDDoS on page 20](#)
- [FortiDeceptor on page 20](#)
- [FortiFirewall and FortiFirewallCarrier on page 21](#)
- [FortiMail on page 21](#)
- [FortiManager on page 21](#)
- [FortiNAC on page 21](#)
- [FortiProxy on page 21](#)
- [FortiSandbox on page 21](#)
- [FortiSOAR on page 22](#)
- [FortiSwitch ATCA on page 22](#)
- [FortiWeb on page 22](#)
- [Virtualization on page 22](#)



To confirm that a device model or firmware version is supported by the current firmware version running on FortiAnalyzer, run the following CLI command:

```
diagnose dvm supported-platforms list
```



Always review the Release Notes of the supported platform firmware version before upgrading your device.

Web browsers

FortiAnalyzer 7.0.3 supports the following web browsers:

- Microsoft Edge 80 (80.0.361 or later)
- Mozilla Firefox version 96
- Google Chrome version 97

Other web browsers may function correctly, but are not supported by Fortinet.

FortiOS and FortiOS Carrier



The *FortiAnalyzer Release Notes* communicate support for FortiOS versions that are available at the time of the FortiAnalyzer 7.0.3 release. For additional information about other supported FortiOS versions, please refer to the FortiAnalyzer compatibility chart in the [Fortinet Document Library](#).

See [FortiAnalyzer compatibility with FortiOS](#).

FortiAnalyzer 7.0.3 supports the following versions of FortiOS and FortiOS Carrier:

- 7.0.0 to 7.0.5
- 6.4.0 to 6.4.8
- 6.2.0 to 6.2.10

FortiADC

FortiAnalyzer 7.0.3 supports the following versions of FortiADC:

- 6.2.0 and later
- 6.1.0 and later
- 6.0.0 and later

FortiAI

FortiAnalyzer 7.0.3 supports the following versions of FortiAI:

- 1.5 and later

FortiAnalyzer

FortiAnalyzer 7.0.3 supports the following versions of FortiAnalyzer:

- 7.0.0 and later
- 6.4.0 and later
- 6.2.0 and later

FortiAuthenticator

FortiAnalyzer 7.0.3 supports the following versions of FortiAuthenticator:

- 6.4.0 and later
- 6.3.0 and later
- 6.2.0 and later

FortiCache

FortiAnalyzer 7.0.3 supports the following versions of FortiCache:

- 4.2.0 and later
- 4.1.0 and later
- 4.0.0 and later

FortiClient

FortiAnalyzer 7.0.3 supports the following versions of FortiClient:

- 7.0.0 and later
- 6.4.0 and later
- 6.2.1 and later

FortiDDoS

FortiAnalyzer 7.0.3 supports the following versions of FortiDDoS:

- 6.2.0 and later
- 6.1.0 and later
- 6.0.0 and later

Limited support. For more information, see [Feature support on page 23](#).

FortiDeceptor

FortiAnalyzer 7.0.3 supports the following versions of FortiDeceptor:

- 4.1 and later
- 4.0 and later
- 3.3 and later

FortiFirewall and FortiFirewallCarrier

FortiAnalyzer 7.0.3 supports the following versions of FortiFirewall and FortiFirewallCarrier:

- 7.0.0 and later
- 6.4.0 and later
- 6.2.0 and later

FortiMail

FortiAnalyzer 7.0.3 supports the following versions of FortiMail:

- 7.0.0 and later
- 6.4.0 and later
- 6.2.0 and later

FortiManager

FortiAnalyzer 7.0.3 supports the following versions of FortiManager:

- 7.0.0 and later
- 6.4.0 and later
- 6.2.0 and later

FortiNAC

FortiAnalyzer 7.0.3 supports the following versions of FortiNAC:

- 9.2.0 and later
- 9.1.0 and later
- 8.8.0 and later

FortiProxy

FortiAnalyzer 7.0.3 supports the following versions of FortiProxy:

- 7.0.0 to 7.0.5
- 2.0.0 to 2.0.5
- 1.2.0 to 1.2.13
- 1.1.0 to 1.1.6
- 1.0.0 to 1.0.7

FortiSandbox

FortiAnalyzer 7.0.3 supports the following versions of FortiSandbox:

- 4.2.0 and later
- 4.0.0 and later
- 3.2.0 and later
- 3.1.0 and later

FortiSOAR

FortiAnalyzer 7.0.3 supports the following versions of FortiSOAR:

- 6.4.0 and later
- 6.0.0 and later

FortiSwitch ATCA

FortiAnalyzer 7.0.3 supports the following versions of FortiSwitch ATCA:

- 5.2.0 and later
- 5.0.0 and later
- 4.3.0 and later

FortiWeb

FortiAnalyzer 7.0.3 supports the following versions of FortiWeb:

- 7.0.0 and later
- 6.4.0 and later
- 6.3.0 and later

Virtualization

FortiAnalyzer 7.0.3 supports the following virtualization software:

- Amazon Web Service AMI, Amazon EC2, Amazon EBS
- Citrix XenServer 7.2
- Google Cloud Platform
- Linux KVM Redhat 7.1
- Microsoft Azure
- Microsoft Hyper-V Server 2012, 2016, and 2019
- Nutanix AHV (AOS 5.10.5)
- OpenSource XenServer 4.2.5
- Oracle Private Cloud
- VMware ESXi versions 5.0, 5.5, 6.0, 6.5 , 6.7, and 7.0

Feature support

The following table lists FortiAnalyzer feature support for log devices.

Platform	Log View	FortiView	Event Management	Reports
FortiGate	✓	✓	✓	✓
FortiCarrier	✓	✓	✓	✓
FortiADC	✓		✓	
FortiAI	✓	✓	✓	✓
FortiAnalyzer	✓		✓	
FortiAuthenticator	✓			
FortiCache	✓		✓	✓
FortiClient registered to FortiGate	✓	✓		✓
FortiClient registered to FortiClient EMS	✓	✓		✓
FortiDDoS	✓	✓	✓	✓
FortiDeceptor	✓			
FortiFirewall	✓	✓	✓	✓
FortiMail	✓		✓	✓
FortiManager	✓		✓	
FortiNAC	✓			
FortiProxy	✓		✓	✓
FortiSandbox	✓		✓	✓
FortiSOAR	✓		✓	✓
FortiWeb	✓		✓	✓
Syslog	✓		✓	✓

Language support

The following table lists FortiAnalyzer language support information.

Language	GUI	Reports
English	✓	✓
Chinese (Simplified)	✓	✓
Chinese (Traditional)	✓	✓
French		✓
Hebrew		✓
Hungarian		✓
Japanese	✓	✓
Korean	✓	✓
Portuguese		✓
Russian		✓
Spanish		✓

To change the FortiAnalyzer language setting, go to *System Settings > Admin > Admin Settings*, in *Administrative Settings > Language* select the desired language on the drop-down menu. The default value is *Auto Detect*.

Russian, Hebrew, and Hungarian are not included in the default report languages. You can create your own language translation files for these languages by exporting a predefined language from FortiAnalyzer, modifying the text to a different language, saving the file as a different language name, and then importing the file into FortiAnalyzer. For more information, see the *FortiAnalyzer Administration Guide*.

Supported models

The following tables list which FortiGate, FortiCarrier, FortiDDoS, FortiAnalyzer, FortiMail, FortiSandbox, FortiSwitch ATCA, FortiWeb, FortiCache, FortiProxy, and FortiAuthenticator models and firmware versions that can be managed by a FortiManager or send logs to a FortiManager running version 7.0.3.



Software license activated LENC devices are supported, if their platforms are in the supported models list. For example, support of FG-3200D indicates support of FG-3200D-LENC.

This section contains the following topics:

- [FortiGate models on page 25](#)
- [FortiGate special branch models on page 28](#)
- [FortiCarrier models on page 29](#)
- [FortiADC models on page 30](#)
- [FortiAI models on page 31](#)
- [FortiAnalyzer models on page 31](#)
- [FortiAuthenticator models on page 32](#)
- [FortiCache models on page 32](#)

- [FortiDDoS models on page 32](#)
- [FortiDeceptor models on page 32](#)
- [FortiFirewall models on page 33](#)
- [FortiFirewallCarrier models on page 33](#)
- [FortiMail models on page 33](#)
- [FortiNAC models on page 33](#)
- [FortiProxy models on page 34](#)
- [FortiSandbox models on page 34](#)
- [FortiSOAR models on page 34](#)
- [FortiSwitch ATCA models on page 34](#)
- [FortiWeb models on page 35](#)

FortiGate models

The following FortiGate models are released with FortiOS firmware. For information about supported FortiGate models on special branch releases of FortiOS firmware, see [FortiGate special branch models on page 28](#).

Model	Firmware Version
FortiGate: FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60EDSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-80E, FortiGate80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300D, FortiGate-300E, FortiGate301E, FortiGate-400D, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate600E, FortiGate-601E, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-2000E, FortiGate-2200E, FortiGate2201E, FortiGate-2500E, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate3960E, FortiGate-3980E	7.0
FortiGate 5000 Series: FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1	
FortiGate DC: FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-DC, FortiGate-3980E-DC	
FortiWiFi: FortiWiFi-40F, FortiWiFi-40F-3G4G, FortiWiFi-60E, FortiWiFi-60E-DSL, FortiWiFi-60E-DSLJ, FortiWiFi-60F, FortiWiFi-61E, FortiWiFi-61F, FortiWiFi-80F-2R, FortiWiFi-81F-2R, FortiWiFi-81F-2R-3G4G-POE, FortiWiFi-81F-2R-POE	

Model	Firmware Version
FortiGate VM: FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-AWS, FortiGate-VM64-AZURE, FortiGate-VM64-GCP, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-ARM64-KVM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-Xen, FortiGate-VMX, FortiGate-VMX-Service-Manager, FortiGate-VM64-IBM FortiOS: FortiOS-VM64, FortiOS-VM64-HV, FortiOS-VM64-KVM, FortiOS-VM64-Xen FortiGateRugged: FortiGateRugged-60F, FortiGateRugged-60F-3G4G	
FortiGate: FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-90E, FortiGate-91E, FortiGate-100D, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate-600E, FortiGate-601E, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E FortiGate 5000 Series: FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1 FortiGate DC: FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-DC, FortiGate-3980E-DC FortiGate Hardware Low Encryption: FortiGate-100D-LENC FortiWiFi: FortiWiFi-40F, FortiWiFi-40F-3G4G, FortiWiFi-60E, FortiWiFi-60E-DSL, FortiWiFi-60E-DSLJ, FortiWiFi-60F, FortiWiFi-61E, FortiWiFi-61F, FortiGate VM: FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-AWS, FortiGate-VM64-AZURE, FortiGate-VM64-AZUREONDEMAND, FortiGate-VM64-GCP, FortiGate-VM64-GCPONDEMAND, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-Xen, FortiGate-VMX, FortiGate-VMX-Service-Manager, FortiGate-VM64-IBM FortiOS: FortiOS-VM64, FortiOS-VM64-HV, FortiOS-VM64-KVM, FortiOS-VM64-Xen FortiGateRugged: FortiGateRugged-60F, FortiGateRugged-60F-3G4G	6.4

Model	Firmware Version
FortiGate: FortiGate-30E, FortiGate-30E-3G4G-GBL, FortiGate-30E-3G4G-INTL, FortiGate-30E-3G4G-NAM, FortiGate-40F, FortiGate-40F-3G4G, FortiGate-50E, FortiGate-51E, FortiGate-52E, FortiGate-60E, FG-60E-DSL, FG-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-80D, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-92D, FortiGate-100D, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140D, FortiGate-140D-POE, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-201E, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FG-400E, FG-400E-Bypass, FG-401E, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate-600E, FortiGate-601E, FortiGate-800D, FortiGate-900D, FortiGate-1000C, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E FortiGate 5000 Series: FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1 FortiGate 6000 Series: FortiGate-6000F, FortiGate-6300F, FortiGate-6301F, FortiGate-6500F, FortiGate-6501F FortiGate 7000 Series: FortiGate-7000E, FortiGate-7000F FortiGate DC: FortiGate-80C-DC, FortiGate-401E-DC, FortiGate-600C-DC, FortiGate-800C-DC, FortiGate-800D-DC, FortiGate-1000C-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3240C-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-DC, FortiGate-3980E-DC, FortiGate-6300F-DC, FortiGate-6301F-DC, FortiGate-6500F-DC, FortiGate-6501F-DC FortiGate Hardware Low Encryption: FortiGate-80C-LENC, FortiGate-100D-LENC, FortiGate-600C-LENC, FortiGate-1000C-LENC FortiWiFi: FortiWiFi-30E, FortiWiFi-30E-3G4G-INTL, FortiWiFi-30E-3G4G-NAM, FortiWiFi-40F, FortiWiFi-40F-3G4G, FortiWiFi-50E, FortiWiFi-50E-2R, FortiWiFi-51E, FortiWiFi-60E, FortiWiFi-60E-DSL, FortiWiFi-60E-DSLJ, FortiWiFi-60F, FortiWiFi-61E, FortiWiFi-61F, FortiWiFi-80F-2R, FortiWiFi-81F-2R, FortiWiFi-81F-2R-POE, FortiGate-VM: FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-ALIONDEMAND, FortiGate-VM64-AWS, FortiGate-VM64-AWSONDEMAND, FortiGate-VM64-AZUREONDEMAND, FortiGate-VM64-Azure, FortiGate-VM64-GCP, FortiGate-VM64-GCPONDEMAND, FortiGate-VM64-HV, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-Xen, FortiGate-VMX-Service-Manager FortiGate Rugged: FortiGateRugged-30D, FortiGateRugged-35D, FortiGateRugged-60F, FortiGateRugged-60F-3G4G, FortiGateRugged-90D FortiOS: FortiOS-VM64, FortiOS-VM64-HV, FortiOS-VM64-KVM, FortiOS-VM64-Xen	6.2

FortiGate special branch models

The following FortiGate models are released on special branches of FortiOS. FortiAnalyzer version 7.0.3 supports these models on the identified FortiOS version and build number.

For information about supported FortiGate models released with FortiOS firmware, see [FortiGate models on page 25](#).

FortiOS 7.0

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-1800F, FortiGate-1800F-DC FortiGate-1801F, FortiGate-1801F-DC	7.0	Build 291 and special branch 4334
FortiGate-3500F FortiGate-3501F	7.0	Build 294 and special branch 4344
FortiGate-2600F, FortiGate-2600F-DC FortiGate-2601F, FortiGate-2601F-DC	7.0	Build 291 and special branch 4334
FortiGate-4200F, FortiGate-4200F-DC FortiGate-4201F, FortiGate-4201F-DC	7.0	Build 291 and special branch 4334
FortiGate-4400F, FortiGate-4400F-DC FortiGate-4401F, FortiGate-4401F-DC	7.0	Build 291 and special branch 4334

FortiOS 6.4

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-1800F, FortiGate-1800F-DC FortiGate-1801F, FortiGate-1801F-DC	6.4.8	6165
FortiGate-2600F, FortiGate-2600F-DC FortiGate-2601F, FortiGate-2601F-DC	6.4.8	6165
FortiGate-4200F, FortiGate-4200F-DC FortiGate-4201F, FortiGate-4201F-DC	6.4.8	6165
FortiGate-80F-POE, FortiGate-81F-POE	6.4.7	5944
FortiWiFi-80F-2R FortiWiFi-81F-2R FortiWiFi-81F-2R-3G4G-POE FortiWiFi-81F-2R-POE	6.4.7	5944
FortiGate-3500F	6.4.6	5886
FortiGate-3501F	6.4.6	6132

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-4400F, FortiGate-4400F-DC FortiGate-4401F, FortiGate-4401F-DC	6.4.6	5868
FortiGate-6000F	6.4.6	1766
FortiGate-7000E, FortiGate-7000F	6.4.6	1766

FortiOS 6.2

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-80D	6.2.10	5168
FortiGate-1800F, FortiGate-1800F-DC FortiGate-1801F, FortiGate-1801F-DC	6.2.9	7197
FortiGate-2600F, FortiGate-2600F-DC FortiGate-2601F, FortiGate-2601F-DC	6.2.9	7197
FortiGate-4200F, FortiGate-4200F-DC FortiGate-4201F, FortiGate-4201F-DC	6.2.9	7197
FortiGate-4400F, FortiGate-4400F-DC	6.2.9	7197
FortiGate-4401F, FortiGate-4401F-DC	6.2.9	7197
FortiWiFi-80F-2R-3G4G-DSL FortiWiFi-81F-2R-3G4G-DSL	6.2.6	7219
FortiWiFi-81F-2R-3G4G-POE	6.2.6	7099
FortiWiFi-81F-2R-3G4G-POE	6.2.6	7099

FortiCarrier models

Model	Firmware Version
FortiCarrier: FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1 FortiCarrier-DC: FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC	7.0

Model	Firmware Version
FortiCarrier-VM: FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen, FortiCarrier-ARM64-KVM	
FortiCarrier: FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1 FortiCarrier-DC: FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC FortiCarrier-VM: FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	6.4
FortiCarrier: FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1 FortiCarrier-DC: FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC FortiCarrier 6K and 7K: FortiCarrier-6000F, FortiCarrier-6300F, FortiCarrier-6301F, FortiCarrier-6500F, FortiCarrier-6501F, FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7000F, FortiCarrier-7121F, FortiCarrier-7121F-2 FortiCarrier 6K and 7K DC: FortiCarrier-6000F-DC, FortiCarrier-6300F-DC, FortiCarrier-6301F-DC, FortiCarrier-6500F-DC, FortiCarrier-6501F-DC, FortiCarrier-7060E-8-DC, FortiCarrier-7121F-DC, FortiCarrier-7121F-2-DC FortiCarrier-VM: FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	6.2

FortiADC models

Model	Firmware Version
FortiADC: FortiADC-100F, FortiADC-120F, FortiADC-200D, FortiADC-200F, FortiADC-220F, FortiADC-300D, FortiADC-300F, FortiADC-400D, FortiADC-400F, FortiADC-700D, FortiADC-1000F, FortiADC-1200F, FortiADC-1500D, FortiADC-2000D, FortiADC-2000F, FortiADC-2200F, FortiADC-4000D, FortiADC-4000F, FortiADC-4200F, FortiADC-5000F FortiADC VM: FortiADC-VM	6.2

Model	Firmware Version
FortiADC: FortiADC-100F, FortiADC-200D, FortiADC-200F, FortiADC-220F, FortiADC-300D, FortiADC-300F, FortiADC-400D, FortiADC-400F, FortiADC-700D, FortiADC-1000F, FortiADC-1200F, FortiADC-1500D, FortiADC-2000D, FortiADC-2000F, FortiADC-2200F, FortiADC-4000D, FortiADC-4000F, FortiADC-4200F, FortiADC-5000F FortiADC VM: FortiADC-VM	6.0, 6.1

FortiAI models

Model	Firmware Version
FortiAI: FAI-3500F FortiAI-VM: FAI-VM, FAI-KVM	1.5

FortiAnalyzer models

Model	Firmware Version
FortiAnalyzer: FortiAnalyzer-150G, FortiAnalyzer-200F, FortiAnalyzer-300F, FortiAnalyzer-300G, FortiAnalyzer-400E, FortiAnalyzer-800F, FortiAnalyzer-800G, FortiAnalyzer-1000F, FortiAnalyzer-2000E, FortiAnalyzer-3000E, FortiAnalyzer-3000F, FortiAnalyzer-3000G, FortiAnalyzer-3500E, FortiAnalyzer-3500F, FortiAnalyzer-3500G, FortiAnalyzer-3700F, FortiAnalyzer-3900E FortiAnalyzer VM: FortiAnalyzer-DOCKER, FortiAnalyzer-VM64, FortiAnalyzer-VM64-AWS, FortiAnalyzer-VM64-Azure, FortiAnalyzer-VM64-GCP, FortiAnalyzer-VM64-HV, FortiAnalyzer-VM64-KVM, FortiAnalyzer-VM64-OPC, FortiAnalyzer-VM64-Xen	7.0
FortiAnalyzer: FortiAnalyzer-150G, FortiAnalyzer-200F, FortiAnalyzer-300F, FortiAnalyzer-300G, FortiAnalyzer-400E, FortiAnalyzer-800F, FortiAnalyzer-800G, FortiAnalyzer-1000E, FortiAnalyzer-1000F, FortiAnalyzer-2000E, FortiAnalyzer-3000E, FortiAnalyzer-3000F, FortiAnalyzer-3000G, FortiAnalyzer-3500E, FortiAnalyzer-3500F, FortiAnalyzer-3500G, FortiAnalyzer-3700F, FortiAnalyzer-3900E FortiAnalyzer VM: FortiAnalyzer-DOCKER, FortiAnalyzer-VM64, FortiAnalyzer-VM64-ALI, FortiAnalyzer-VM64-ALI-OnDemand, FortiAnalyzer-VM64-AWS, FortiAnalyzer-VM64-AWSOnDemand, FortiAnalyzer-VM64-Azure, FortiAnalyzer-VM64-Azure-OnDemand, FortiAnalyzer-VM64-GCP, FortiAnalyzer-VM64-GCP-OnDemand, FortiAnalyzer-VM64-HV, FortiAnalyzer-VM64-KVM, FortiAnalyzer-VM64-OPC, FortiAnalyzer-VM64-Xen	6.4
FortiAnalyzer: FAZ-200D, FAZ-200F, FAZ-300D, FAZ-300F, FAZ-300G, FAZ-400E, FAZ-800F, FAZ-1000D, FAZ-1000E, FAZ-1000F, FAZ-2000E, FAZ-3000D, FAZ-3000E, FAZ-3000F, FAZ-3000G, FAZ-3500E, FAZ-3500F, FAZ-3500G, FAZ-3700F and FAZ-3900E. FortiAnalyzer VM: FortiAnalyzer-DOCKER, FAZ-VM64, FAZ-VM64-Ali, FAZ-VM64-AWS, FAZ-VM64-AWS-OnDemand, FAZ-VM64-Azure, FAZ-VM64-GCP, FortiAnalyzer-VM64-GCP-OnDemand, FAZ-VM64-HV, FAZ-VM64-KVM, FAZ-VM64-OPC, and FAZ-VM64-XEN (Citrix XenServer and Open Source Xen).	6.2

FortiAuthenticator models

Model	Firmware Version
FortiAuthenticator: FAC-200D, FAC-200E, FAC-300F, FAC-400C, FAC-400E, FAC-800F, FAC-1000C, FAC-1000D, FAC-2000E, FAC-3000D, FAC-3000E FortiAuthenticator VM: FAC-VM	6.2, 6.3, 6.4

FortiCache models

Model	Firmware Version
FortiCache: FCH-400C, FCH-400E, FCH-1000C, FCH-1000D, FCH-3000C, FCH-3000D, FCH-3000E, FCH-3900E FortiCache VM: FCH-KVM, FCH-VM64	4.1, 4.2
FortiCache: FCH-400C, FCH-400E, FCH-1000C, FCH-1000D, FCH-3000C, FCH-3000D, FCH-3900E FortiCache VM: FCH-VM64	4.0

FortiDDoS models

Model	Firmware Version
FortiDDoS: FortiDDoS-200F, FortiDDoS-1500F FortiDDoS VM: FortiDDoS-VM	6.0, 6.1, 6.2

FortiDeceptor models

Model	Firmware Version
FortiDeceptor: FDC-1000F, FDC-1000G FortiDeceptor Rugged: FDCR-100G FortiDeceptor VM: FDC-VM	4.1
FortiDeceptor: FDC-1000F, FDC-1000G FortiDeceptor Rugged: FDCR-100G FortiDeceptor VM: FDC-VM	4.0
FortiDeceptor: FDC-1000F, FDC-3000D FortiDeceptor VM: FDC-VM	3.3

FortiFirewall models

Some of the following FortiFirewall models are released on special branches of FortiFirewall firmware. FortiAnalyzer version 7.0.3 supports these models on the identified FortiFirewall firmware version and build number.

Model	Firmware Version	Firmware Build
FortiFirewall: FortiFirewall-3980E FortiFirewall DC: FortiFirewall-3980E-DC	6.2	1262
FortiFirewall: FortiFirewall-4200F	6.2.7	5141
FortiFirewall: FortiFirewall-4400F	6.2.7	5148

FortiFirewallCarrier models

The following FortiFirewallCarrier models are released on special branches of FortiFirewallCarrier firmware. FortiAnalyzer version 7.0.3 supports these models on the identified FortiFirewallCarrier firmware version and build number.

Model	Firmware Version	Firmware Build
FortiFirewallCarrier: FortiFirewallCarrier-4200F, FortiFirewallCarrier-4400F	6.2.7	5148

FortiMail models

Model	Firmware Version
FortiMail: FE-60D, FE-200D, FE-200E, FE-200F, FE-400E, FE-400F, FE-900F, FE-1000D, FE-2000E, FE-2000F, FE-3000D, FE-3000E, FE-3000F, FE-3200E FortiMail VM: FML-VM	7.0
FortiMail: FE-60D, FE-200D, FE-200E, FE-200F, FE-400E, FE-400F, FE-900F, FE-1000D, FE-2000E, FE-3000D, FE-3000E, FE-3200E FortiMail VM: FML-VM	6.2, 6.4

FortiNAC models

Model	Firmware Version
FortiNAC: FortiNAC-500, FortiNAC-600, FortiNAC-700, FortiNAC-C-1000C, FortiNAC-C-2000C, FortiNAC-Manager-550 FortiNAC VM: FortiNAC-C-VM, FortiNAC-CA-VM, FortiNAC-M-VM	8.8, 9.1, 9.2

FortiProxy models

Model	Firmware Version
FortiProxy: FPX-400E, FPX-2000E, FPX-4000E	7.0
FortiProxy VM: FortiProxy-AWS, FortiProxy-Azure, FortiProxy-GCP, FortiProxy-HyperV, FortiProxy-KVM, FortiProxy-VM64	
FortiProxy: FPX-400E, FPX-2000E, FPX-4000E	1.2, 2.0
FortiProxy VM: FortiProxy-KVM, FortiProxy-VM64	

FortiSandbox models

Model	Firmware Version
FortiSandbox: FSA-500F, FSA-1000D, FSA-1000F, FSA-2000E, FSA-3000D, FSA-3000E, FSA-3000F, FSA-3500D	4.0
FortiSandbox DC: FSA-1000F-DC	
FortiSandbox-VM: FortiSandbox-AWS, FortiSandbox-Cloud, FSA-VM	
FortiSandbox: FSA-500F, FSA-1000D, FSA-1000F, FSA-2000E, FSA-3000D, FSA-3000E, FSA-3500D	3.1, 3.2
FortiSandbox DC: FSA-1000F-DC	
FortiSandbox-VM: FortiSandbox-AWS, FSA-VM	

FortiSOAR models

Model	Firmware Version
FortiSOAR VM: FortiSOAR-VM	6.0, 6.4

FortiSwitch ATCA models

Model	Firmware Version
FortiController: FTCL-5103B, FTCL-5903C, FTCL-5913C	5.2
FortiSwitch-ATCA: FS-5003A, FS-5003B	5.0
FortiController: FTCL-5103B	
FortiSwitch-ATCA: FS-5003A, FS-5003B	4.3

FortiWeb models

Model	Firmware Version
FortiWeb: FortiWeb-100D, FortiWeb-100E, FortiWeb-400C, FortiWeb-400D, FortiWeb-400E, FortiWeb-600D, FortiWeb-600E, FortiWeb-1000D, FortiWeb-1000E, FortiWeb-2000E, FortiWeb-2000F, FortiWeb-3000C, FortiWeb-3000CFSX, FortiWeb-3000D, FortiWeb-3000DFSX, FortiWeb-3000E, FortiWeb-3000F, FortiWeb-3010E, FortiWeb-4000C, FortiWeb-4000D, FortiWeb-4000E, FortiWeb-4000F FortiWeb VM: FortiWeb-Azure, FortiWeb-Azure_OnDemand, FortiWeb-Docker, FortiWeb-GCP, FortiWeb-GCP_OnDemand, FortiWeb-HyperV, FortiWeb-VM, FortiWeb-XENOpenSource, FortiWeb-XENServer	6.4, 7.0
FortiWeb: FortiWeb-100D, FortiWeb-100E, FortiWeb-400C, FortiWeb-400D, FortiWeb-400E, FortiWeb-600D, FortiWeb-600E, FortiWeb-1000D, FortiWeb-1000E, FortiWeb-2000E, FortiWeb-3000C, FortiWeb-3000CFSX, FortiWeb-3000D, FortiWeb-3000DFSX, FortiWeb-3000E, FortiWeb-3010E, FortiWeb-4000C, FortiWeb-4000D, FortiWeb-4000E FortiWeb VM: FortiWeb-Azure, FortiWeb-Azure_OnDemand, FortiWeb-Docker, FortiWeb-GCP, FortiWeb-GCP_OnDemand, FortiWeb-HyperV, FortiWeb-VM, FortiWeb-XENOpenSource, FortiWeb-XENServer	6.3

Resolved Issues

The following issues have been fixed in FortiAnalyzer version 7.0.3. To inquire about a particular bug, please contact [Customer Service & Support](#).

Device Manager

Bug ID	Description
626506	When FortiManager sends syslogs to FortiAnalyzer, the FortiManager device may appear twice as unauthenticated devices.
638080	FortiAnalyzer ha-member-auto-grouping may not work FortiGate HA devices.
695804	Device Manager may not show FortiGate Fabric members under the root Fabric tree.
753567	In some rare cases, only some fabric devices may appear in the fabric group tree.

Fabric View

Bug ID	Description
727056	SD-WAN Monitor may show incorrect bandwidth.
741910	Top Cloud Applications may show 0 KB utilization under the Bandwidth column.
744910	"Bandwidth" should not be used in the FortiView's graphs or tables when they are actually showing "bytes received and sent".

FortiSOC

Bug ID	Description
760020	The pre-filters in the event handler may cause the sqllogd to crash every two to three seconds.

FortiView

Bug ID	Description
742005	FortiView widgets may take a very long time to load.
751295	FortiView's Secure SD-WAN and Secure SD WAN report should display correct information for Health Checker's packet loss.
753911	Monitor should be able to show values with faster response time.
756502	Exporting to Report Chart may fail for "Top Apps by Installs fails".
770206	FortiAnalyzer may take more than two minutes to show log details with Top threat view with two filters.

Log View

Bug ID	Description
653765	Some log files under Log Browse may contain a mix of event and traffic messages.
660274	FortiAnalyzer should roll active logs on a weekly basis by default.
691552	FortiAnalyzer may be missing a double quote in direction log field.
726340	oftpd may not work properly if many log requests are received at the same time.
735065	FortiAnalyzer may not handle many re-connection requests causing FortiGate devices log system event on disconnecting or connecting.
740046	ADOM archive should not be higher than the configured value.
746596	FortiAnalyzer may be showing two VDOMs, root and default, in Log Browse for FortiClient devices.
750515	FortiAnalyzer may stop receiving logs every day until it has been rebooted.
755515	FortiGate may show, "Failed to get FAZ's status. Authentication Failed. (-19)", when the device has been authorized and sending logs to FortiAnalyzer.
755988	FortiAnalyzer may gradually stop to receiving logs due to leaks in receiving buffers.
759107	FortiAnalyzer may gradually stop to receiving logs due to leaks in receiving buffers.
765710	When service is not in the log entry, filter based on negative service still should show related logs in the filtered result.

Others

Bug ID	Description
660310	Drilldown compromised host from FortiGate may not work.
676446	FortiAnalyzer should change login-max and docker-user-login-max range from 1-32 to 1-256.
698361	SNMPv3 engineBoots may not properly be initialized.
701753	SIEM database should be trimmed at the same time when quota enforcement occurs.
712159	When FortiAnalyzer is changed to Collector mode, siemdb should automatically stop working.
714991	The login interface may crash if user inputs pre-login banner text in encoding other than UTF-8.
732116	Setting of "FortiCloud Single Sign-On" is always displayed on login.
752817	Log disk usage may frequently reach 99% due to calculation on the siemdb size.
755843	There may no a lot of errors showing "could not read block 0 in file" in pgsvr.log.
756659	When rebuilding database on the FortiAnalyzer HA's secondary unit, it may stuck at 1%.
756846	Under Microsoft Azure, FortiAnalyzer HA's secondary IP does not move to new primary after HA failover.
758028	FortiAnalyzer may frequently send 'csf-check' requests causing miglogd consuming 99% of the CPU resources.
758237	The sqllogd may take a long time to startup.
765146	Disk I/O is at 100% with no log insertion due to a device is wrongly recognized as a cell phone with multiple IP addresses.
765214	After a HA device is deleted, its device ID still appears in "diag test app sqllogd 81".

Reports

Bug ID	Description
653207	FortiAnalyzer may have incorrect dataset queries without considering the 'direction' field.
683353	After exported report template from FortiAnalyzer 6.2 and imported the template to a later version, FortiAnalyzer may show an error, "Invalid Device or Vdom".
694181	Customized cover page may not be consistent with the configuration preview with editor.
703772	Scheduled report created from JSON API may not be visible on GUI.
713906	Report may show no active users when there are logs for active users.
722573	Restoring reports for a thousand of ADOMs may take many hours with high memory usage.

Bug ID	Description
740220	Log field list for filter may be empty with FortiClient ADOM.
742288	FortiAnalyzer may not be able to clone SD-WAN Device-Interface Inbandwidth Line chart.
748847	Report filtering may not work when five hundreds plus FortiGate devices are selected.
756363	"Template Secure SD-WAN Report" may not show a graphic that includes both the "SLA Name object" and "WAN interface" fields.
756620	"360-Degree Security Review" Report has typo in chart header, "Spayware".
767358	When using report with report group, Application and Bandwidth Report may not show the correct values and data.

System Settings

Bug ID	Description
682026	When creating a log forwarding entry, user should be able to select a FortiADC device from GUI.
694724	After upgraded FortiAnalyzer, FortiGate HA devices may get removed from the list of devices defined within the log forwarding configurations.
708958	Changing Timezone on FortiAnalyzer does not take effect on FortiSOC.
722250	When Device Manager's permission is set at Read-Write and System Settings' permission is set at Read-Only, SAML login user cannot create new or edit ADOM.
723132	When FortiAnalyzer receives logs after there is an offline event, FortiAnalyzer should show status changes with event messages.
742804	TACACS user is not able to browse Log View.
748184	FortiAnalyzer may show ADOM that stores logs that exceeds FortiAnalyzer log storage criteria.
765818	The forwarded CEF start time is different than the original timestamp of the log.
773055	Archive percentage should not exceed more than 100% of the disk space allocated.

Known Issues

The following issues have been identified in FortiAnalyzer version 7.0.3. To inquire about a particular bug or to report a bug, please contact [Fortinet Customer Service & Support](#).

Device Manager

Bug ID	Description
749455	FortiAnalyzer may incorrectly detect FortiNAC firmware version.

FortiSOC

Bug ID	Description
685263	Playbook failed to get software inventory from EMS server when site is enabled on EMS server.
717841	IOC events and FortiGate Event Handler events are not being sent to FortiGate from FortiAnalyzer.

FortiView

Bug ID	Description
641596	FortiAnalyzer may show "No Data" in "User Vulnerabilities Summary" widget.
707480	Top Threats(FortiClient) may only display Threat level "LOW" and "Allowed" incidents.
768270	Secure SD-WAN Monitor shows 'No Data' if only HA member has the SD-WAN logs.

Log View

Bug ID	Description
704206	When filtering with "Action" and "Source IP" under Traffic menu, the filter output may be incorrect with the combination of smart action with any other field.

Bug ID	Description
752407	FortiAnalyzer Log View Filter vanishes after displayed log details and returns to the log page with filter.
760597	FortiAnalyzer shows improperly Subject field values for FortiMail logs and in log details when the log has Cyrillic symbols.
763852	If a user uses "Filter Mode" and type "=", FortiAnalyzer returns equal character, "=", twice.
771086	FortiAnalyzer displays Invalid log file format error message when importing log backup to FortiAnalyzer.

Others

Bug ID	Description
773745	FortiAnalyzer should try to connect to forticlient or forticlient-emsproxy.forticloud.com when enabling EMS cloud.

Reports

Bug ID	Description
764194	Playbooks run_report fails with "missing device(s)" if "Playbook Starter" as devices filter is selected.
766123	"Selected data binding is invalid" is shown for "Data Binding" in the chart details for "Traffic statistic".
771072	Secure SD-WAN CSV report does not show device names for charts.

System Settings

Bug ID	Description
653371	CEF log forwarding start time does not match with event time.
734001	FortiAnalyzer HA may randomly fail-over.
748107	Additional timestamp, tz field, is being added to forwarded logs from FortiAnalyzer.
758040	FortiAnalyzer may be unable to establish Log Forward session with remote server using encrypted forwarding.

Bug ID	Description
759601	FortiAnalyzer using Azure AD SAML SSO may show 'invalid_logout_response_error' after logout.

Appendix A - Default and maximum number of ADOMs supported

This section identifies the supported number of ADOMs for FortiAnalyzer hardware models and virtual machines.

See also the [FortiAnalyzer Data Sheet](#).

Hardware models



For ADOM subscription licenses, FortiAnalyzer enforces the ADOM limits.

For hardware models that do not support the ADOM subscription license, ADOM limits are recommended, but not enforced.

FortiAnalyzer supports a default number of ADOMs based on hardware model.

Some hardware models support an ADOM subscription license. When you purchase an ADOM subscription license, you increase the number of supported ADOMs. For example, you can purchase an ADOM subscription license for the FAZ-3000G series, which allows you to use up to a maximum of 1200 ADOMs.

Other hardware models do not support the ADOM subscription license. For hardware models that do not support the ADOM subscription license, the default and maximum number of ADOMs is the same.

FortiAnalyzer Platform	Default number of ADOMs	ADOM license support?	Maximum number of ADOMs
Desktop models	1		1
150G Series	3		3
300F/300G and 400E Series	25		25
800F/800G and 1000F Series	50		50
2000E Series	250		250
3000F Series	500		500
3000G Series	500	✓	1200
3500F/3500G	500		500
3700F Series	1200		1200
3700G Series	1200	✓	10,000

Virtual Machines



For subscription licenses, FortiAnalyzer enforces the ADOM limits.
For perpetual licenses, ADOM limits are recommended, but not enforced.

FortiAnalyzer subscription license

Five (5) ADOMs are included with FortiAnalyzer VM subscription licenses. Licenses are non-stackable. Additional ADOMs can be purchased with an ADOM subscription license.

FortiAnalyzer perpetual license

Recommended maximum number of ADOMs supported:

FortiAnalyzer Platform	Default number of ADOMs
1 GB/Day < License <= 5 GB/Day	10
5 GB/Day < License <= 25 GB/Day	25
25 GB/Day < License <= 100 GB/Day	50
100 GB/Day < License <= 500 GB/Day	250
500 GB/Day < License <= 1000 GB/Day	500
1000 GB/Day < License <= 5000 GB/Day	800
License > 5000 GB/Day	1200



www.fortinet.com

Copyright© 2023 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.